ORDERING INFORMATION:

AL XX X XX

- SCHEMATIC(S1-S2)
- TERMINAL (T=FASTON)
- RATING (10-15)
- MODEL

APPLICATION

- AUDIO AMPLIFIER
- AIR CONDITION
- MEDICAL EQUIPMENT
- SEVER POWER
- SWITCHING POWER SUPPLY
- UPS

SCHEMATIC

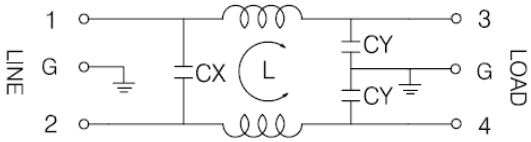

ALXXXS1

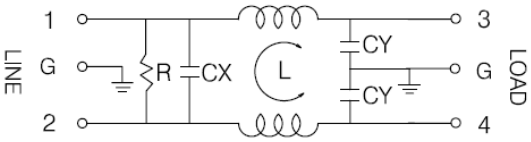

ALXXXS2

PHYSICAL DIMENSIONS(mm)

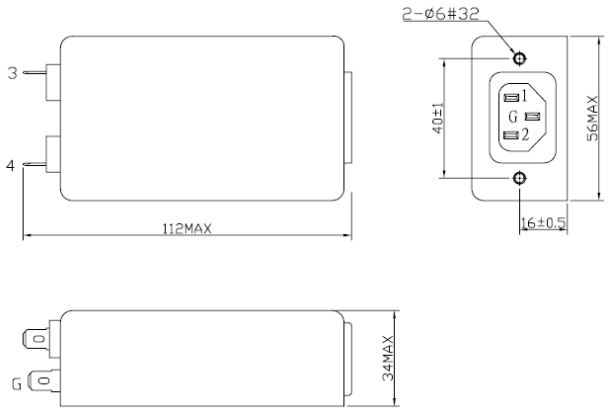

ALXXTXX

SPECIFICATION

RATED CURRENT	10A/15A
RATED VOLTAGE	125VAC/250VAC
POWER LINE FREQUENCY	50/60Hz
HIPOT RATING LINE TO LINE	1450VDC
HIPOT RATING LINE TO GROUND	2250VDC
LEAKAGE CURRENT	2.5mA MAX
INSULATION RESISTANCE	100MΩMIN 500V DC
TEMPERATURE RISE	30˚C MAX.
OPERATING TEMPERATURE	-25~+85℃



AL10



AL15

(— COMM.MODE(L-G)IN HZ —DIFF.MODE(L-L)IN HZ)